

Condensate pump

## EE200


Affordable.Compact.Blue.

- For air conditioning systems, up to 10kW
- Low-noise pump with 1.5-metre-long mains cable
- Integrated non-return valve prevents the backflow of condensate into the container
- Compact construction
- Attractive design
- Stylish wall cladding
- Easy installation



Condensate removal pump with stylish cladding (RAL9016) for wall mounting beneath high wall indoor units.



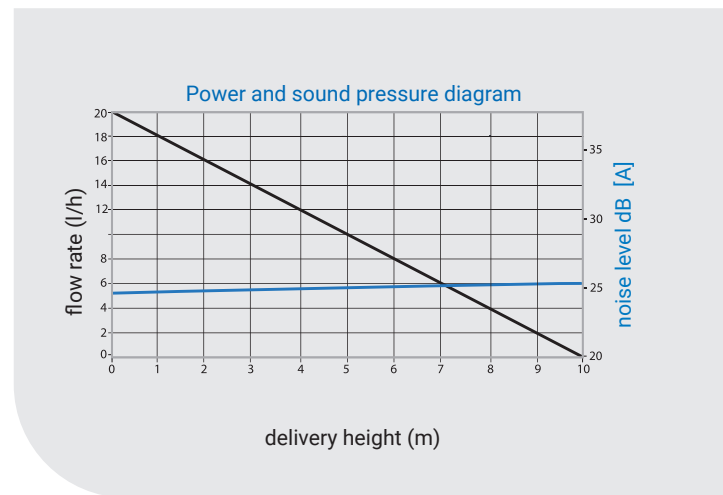

## Technical data

Pump unit (L × W × H)	315 × 54 × 43 mm
Alarm circuit	230V, 5A normally closed (NC)
Electrical spec.	110-230 V, 50/60 Hz
Power consumption	Operation 4 W, Standby 1,5 W
Max. flow rate	20 l/h
Max. delivery height	10 m

Eckerle Technologies GmbH  
 Otto-Eckerle-Str. 6/12A | 76316 Malsch, Germany  
 Tel +49 (0) 7246-9204-0 | Fax +49 (0) 7246-9204-44  
 info@eckerle.com | www.eckerle.com

©2023 All indicated data serve alone the product description and are not as characteristics in the legal sense to be understood. Subject to alterations.